


Incremental Encoders

ATEX, optical	Sendix 7014 SIL (Shaft)	SinCos
---------------	-------------------------	--------

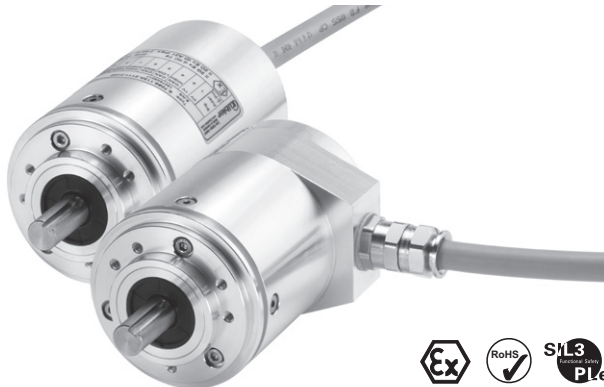

Ex protection and Functional Safety in one device.

The incremental encoders Sendix 7014 SIL are perfectly suited for use in safety-related applications up to SIL3 according to DIN EN ISO 61800-5-2 or PLe to DIN EN ISO 13849.

In addition, these devices ensure Ex protection in a compact 70 mm housing out of seawater-resistant aluminium.



Ex approval	Safety-Lock™	High rotational speed	High IP value	High shaft load capacity	Shock / vibration resistant	Magnetic field proof	Short-circuit proof	Reverse polarity protection	Optical sensor	Seawater-resistant

Functional Safety

- Certified by the German Institute for Occupational Safety (IFA)
- Suitable for SIL3 applications acc. to DIN EN ISO 61800-5-2
- Suitable for PLe applications acc. to DIN EN ISO 13849
- With incremental SinCos tracks

ATEX compliant

- “Flameproof-enclosure” version: approved for zone 1, 2 and 21, 22
- Zone 1, 2 and 21, 22:

Order code	8.7014SIL . 1 X 2 X . XXXX . XXXX					
Shaft version	Type	a	b	c	d	f
a Flange	1 = clamping-synchronous flange ø 70 mm, IP67	c Interface / Power supply	2 = SinCos / 10 ... 30 V DC	e Pulse rate	1024, 2048	<i>optional on request</i> <i>- special cable length</i>
b Shaft (ø x L)	1 = 12 x 25 mm, with keyway for 4 x 4 mm key 2 = 10 x 20 mm, with flat	d Type of connection	1 = axial cable (2 m PUR) 2 = radial cable (2 m PUR) A = axial cable (length > 2 m) B = radial cable (length > 2 m)	f Cable length in dm ¹⁾	0050 = 5 m 0100 = 10 m 0150 = 15 m	

Further accessories can be found in the Accessories section or in the Accessories area of our website at: www.kuebler.com/accessories.
 Additional connectors can be found in the Connection Technology section or in the Connection Technology area of our website at: www.kuebler.com/connection_technology.
You will find an overview of our systems and components for Functional Safety under www.kuebler.com/safety

1) Not applicable with connection types 1 and 2

Incremental Encoders

ATEX, optical		Sendix 7014 SIL (Shaft)	SinCos
Explosion protection			
EC type-examination certificate	PTB09 ATEX 1106 X		
Category (gas)	II 2G Ex d IIC T6		
Category (dust)	II 2D Ex tD A21 IP6X T85°C		
Directive 94/9 EC	EN 60079-0; DIN EN 60079-1 EN 61241-0; DIN EN 61241-1		
Mechanical characteristics			
Max. speed	continuous 6 000 min ⁻¹		
Starting torque	< 0.05 Nm		
Moment of inertia	4.0 x 10 ⁻⁶ kgm ²		
Load capacity of shaft	radial	80 N	
	axial	40 N	
Weight	approx. 0.6 kg		
Protection EN 60 529	IP67		
Working temperature range	-40°C ... +60°C		
Materials	shaft	stainless steel	
	flange / housing	seawater-resistant Al, type AISiMgMn (EN AW-6082) or stainless steel	
	cable	PUR	
Shock resistance acc. EN 60068-2-27	2500 m/s ² , 6 ms		
Vibration resistance acc. EN 60068-2-6	100 m/s ² , 55 ... 2000 Hz		
General electrical characteristics			
Power supply	10 ... 30 V DC		
Current consumption (w/o output load)	max. 45 mA		
Reverse polarity protection for power supply (U _B)	yes		
CE compliant acc. to	EN 61000-6-2, EN 61000-6-4 and EN 61000-6-3		
RoHS compliant acc. to	EU guideline 2002/95/EG		
Output SinCos (A / B)			
Max. frequency -3dB	400 kHz		
Signal level	1 V _{pp} (± 20%)		
Short circuit proof	yes ¹⁾		

1) Short-circuit with 0V or output, only one channel at a time, supply voltage correctly applied

Incremental Encoders

ATEX, optical	Sendix 7014 SIL (Shaft)	SinCos
----------------------	--------------------------------	---------------

Terminal assignment


Interface	Type of connection	Cable								
2	1, 2, A, B	Signal:	GND	+V	A	\bar{A}	B	\bar{B}	PE	PE
		Cable marking:	6	1	7	8	9	10	YE/GN	Schirm

+V: Encoder power supply +V DC
 GND: Encoder Ground GND (0V)
 PE: Protective earth

A, \bar{A} : Incremental output channel A
 B, \bar{B} : Incremental output channel B

Dimensions

Shaft type 1 with axial cable outlet

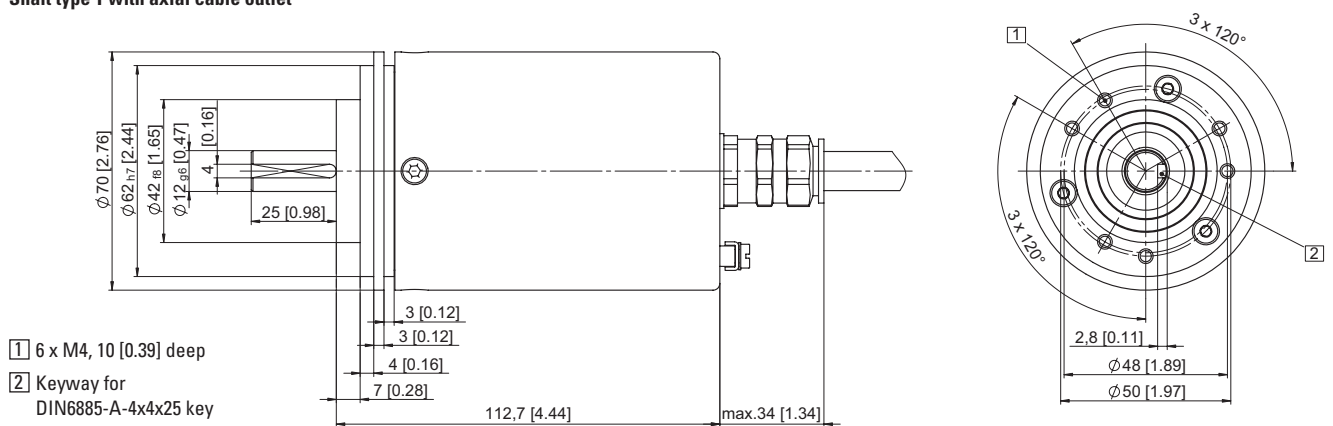

Shaft type 2 with radial cable outlet

