

Accessories

Robust bearing unit Suitable for Sendix 50xx and 58xx



Quick and simple – More protection

Separating the bearing load and the sensor technology affords the encoder greater protection in harsh environments.

Retrofitting to all encoders with a 58 mm clamping flange is very easy and quick.



Shock / vibration resistant



Temperature -40° +85°



High IP value



High shaft load capacity

Order-No. 8.0010.8200.000C


Robust bearing unit

(matching shaft encoders with clamping flange and shaft 10 mm)

Technical Data	
Speed	max. 6.000 min ⁻¹
Weight	ca. 560 g
Protection	IP67
Material	housing aluminium (seawater resistant) shaft stainless steel

Bearing life expectancy L10

at 3,000 revolutions/min with continuous operation

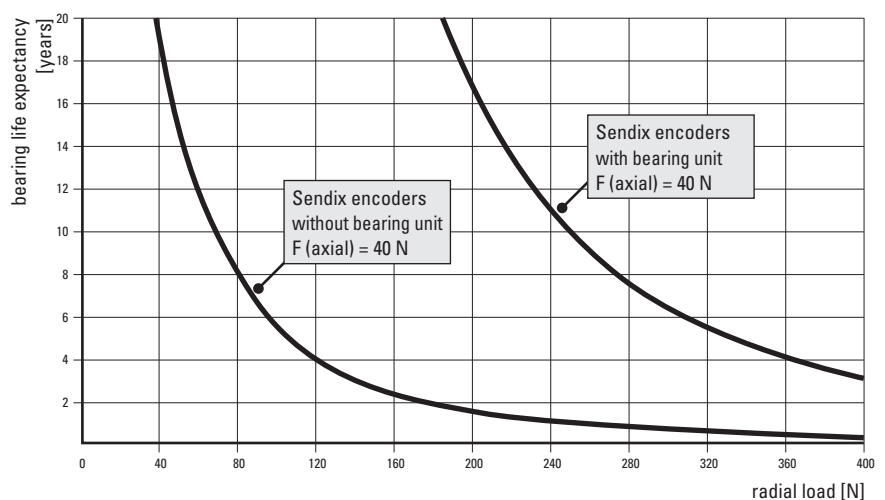

Dimensions

