

# Multifunction devices, electronic

## LED multifunction display

## Multifunctional – pulse, frequency, time (AC+DC)

## Codix 544



The Codix 544 is a voltage-powered multifunction counter with 4 functions in one device:

Pulse, position, frequency and speed display, timer and short time meter.

With 6-digit LED display for NPN, PNP input signals.



<b>DC</b> 10 ... 30 V	<b>AC</b> 10 ... 240 V	 -20°...+65°C	 IP65	 Plug-in screw terminal	 Menu-driven programming	 max. 60 kHz	 Position display	 1/sec - 1/min	 Timer	 HRA
Supply voltage		Temperature range	High protection level			Pulse counter/Totalizer		Frequency meter/tachometer		Frequency meter HRA

### Powerful

- Fast count and frequency input – input frequency max. 60 kHz (can be damped to 30 Hz for mechanical contacts).
- Robust housing – IP65 protected.
- Very bright LED display, 14 mm high, 6 digits.
- Very accurate precise frequency measurement principle (HRA-High Rate Accuracy System)  
Frequencies up to 38 Hz are calculated using time-interval (period duration) measurement. Frequencies > 38 Hz are calculated using a special time base (gate time) measurement. A very high accuracy of < 0.1 % is achieved, even with very short gate times. The resulting measurement is available after a max. of 50 ms.
- Short start-up time – detects input pulses just 16 msec after being switched on => no pulses are lost with a simultaneous motor start-up.

### User-friendly and universal

- Large keys – can also be operated when wearing gloves.
- Programming:
  - Simple uniform menu-driven programming and operation.
  - Possible to enter the programming also during operation with a confirmation prompt.
- Individually programmable scaling: multiplication and division factor (0.0001...99.9999), to display corresponding engineering units, e.g. position in 1/10 mm and speed in RPM.
- 4 different count input modes: 2-channel count input for detecting count direction, difference or adding mode, quadrature with x1, x2 or x4 evaluation.
- Frequency measurement: display in 1/min or 1/sec.
- Time counting: pulse width or time interval measurement in hours, minutes or seconds, as well as real-time display.
- AC or DC supply voltage.
- Inputs: as an alternative to the HTL inputs, devices are available with a 5 V DC input level, for use as parallel displays to PLCs.
- Optional output: zero signal for position and count, zero speed monitoring, 1 Hz clock pulse for active time measurement.

### Order code

6.544 . 01 X . X X 0

#### a Output

- 1 = optocoupler
- 2 = no output

#### b Supply voltage

- 0 = 100 ... 240 V AC, ±10 %
- 3 = 10 ... 30 V DC

#### c Input switching level

- 0 = Standard (HTL)
- A = 4 ... 30 V DC


### Delivery specification

- Digital display
- Mounting clip
- Gasket
- 2 plug-in screw terminals
- Instruction manual, multilingual

# Multifunction devices, electronic

<b>LED multifunction display</b>	<b>Multifunctional – pulse, frequency, time (AC+DC)</b>	<b>Codix 544</b>
----------------------------------	---	------------------

## Accessories / Mounting examples

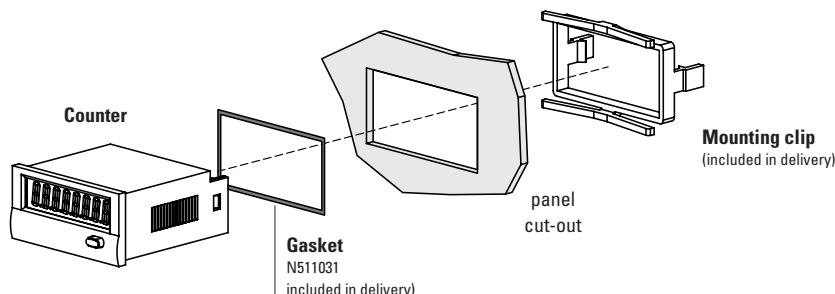

		Type / size	Description		Order no.	
<b>Gasket counter</b>			96 x 49 mm [3.78 x 1.93"]		<b>N511031</b>	
<b>Mounting frame</b>		<b>cut-out</b> 92 x 45 mm [3.62 x 1.77"]	for snap-on mounting on 35 mm [1.38"] top-hat DIN rail	grey	<b>G300005</b>	—
<b>Screw terminal</b> (Replacement part)			1 ... 7, pitch 3.81 1 ... 2, pitch 5.08	7 pin 2 pin	<b>N100387</b> <b>N100133</b>	
						incl. in delivery

## Technical data

General technical data	
<b>Display</b>	6 digit, red 7 segment LED display; 14 mm [0.55"] high
<b>Data backup</b>	EEPROM
<b>Operating temperature</b>	-20 °C ... +65 °C [-4 °F ... +149 °F] (non-condensing)
<b>Storage temperature</b>	-25 °C ... +70 °C [-13 °F ... +158 °F]
<b>Relative humidity</b>	< 85 % (non-condensing)
<b>Altitude</b>	up to 2000 m [6562']

Electrical characteristics	
<b>Supply voltage</b>	10 ... 30 V DC, with integrated reverse polarity protection 100 ... 240 V AC, ±10 %
<b>Current consumption</b>	max. 50 mA, 8 VA
<b>Device safety</b>	designed to protection class application area EN 61010 part 1 2 pollution level 2

Mechanical characteristics	
<b>Housing</b>	front panel mount 96 x 48 mm [3.74 x 1.89"] acc. to DIN 43700; RAL 7021, dark grey
<b>Protection</b>	IP65 (front side)
<b>Weight</b>	approx. 150 g [5.29 oz]

Outputs	
<b>Sensor supply voltage (AC version)</b>	24 V DC ±15 %/100 mA
<b>Optocoupler output</b>	max. 30 V, 10 mA

Inputs	
<b>Polarity of inputs</b>	programmable, NPN or PNP for all inputs
<b>Input resistance</b>	approx. 5 kΩ
<b>Counting frequency <sup>1)</sup></b>	max. 60 kHz, can be damped to 30 Hz max. 25 kHz for position display
<b>Display range</b>	timer 0.001 s ... 999999 h frequency meter 1/min or 1/sec
<b>Minimum pulse duration of the reset input</b>	5 ms
<b>Input switching level standard version (HTL)</b>	
<b>DC supply voltage</b>	LOW 0 ... 0.2 x U <sub>B</sub> [V DC]
	HIGH 0.6 x U <sub>B</sub> ... 30 V DC
<b>AC-supply voltage</b>	LOW 0 ... 4 V DC
	HIGH 12 ... 30 V DC
<b>Input switching level at 4 ... 30 V DC</b>	
	LOW 0 ... 2 V DC
	HIGH 4 ... 30 V DC
<b>Accuracy</b>	tachometer < 0.1 % timer < 50 ppm

Approvals	
<b>UL compliant</b> in accordance with	File no. E128604
<b>CE compliant</b> in accordance with	
EMC Directive	2014/30/EU
RoHS Directive	2011/65/EU
Low Voltage Directive	2014/35/EU


<sup>1)</sup> Details see manual

# Multifunction devices, electronic


LED multifunction display	Multifunctional – pulse, frequency, time (AC+DC)	Codix 544
---------------------------	--	-----------

## Applications for multifunction display


- Counting tasks such as quantity and piece counting, measuring and recording of speed and of operating and processing times
- Piece counting or tool-life measurement on die cutters, presses, extruders, woodworking machines, drilling machines, pick-and-place machines, guillotines, special-purpose vehicles etc.
- Positioning tasks on processing machines, such as sawing machines, milling machines, bending and folding machines, etc.
- Production data acquisition by means of piece counting (using difference or adding), or measurement of production times or production speeds
- Totalizing flow, quantity and other scaleable media, or display of current flow rates.



Position or rotary speed on milling machine



Piece count on conveyor or production speed



Drilling machine head, speed or drilling depth

## Functions

### Pulse counter:

Various counting modes such as count direction, difference, addition, phase discriminator

### Position display:

Phase discriminator with simple, double or quadruple evaluation


### Frequency and speed display:

Pulses per minute or per second scaleable, with HRA measurement


### Hour meters and short-time meters:

Various programmable time ranges with different ways of measuring

## Block diagram

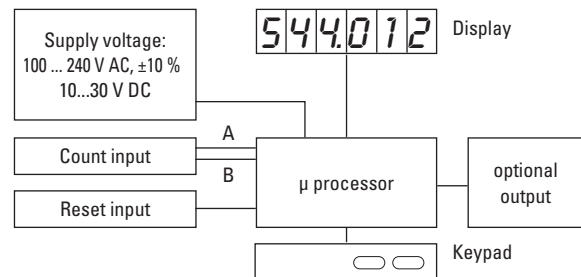

## Terminal assignment

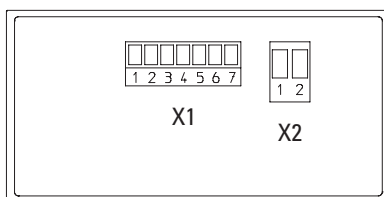

### Connection X1

PIN	AC version	DC version
1	Optocoupler output	Emitter
2	Optocoupler output	Collector
3	Reset / Set	
4	INP B	
5	INP A	
6	GND out	n.c.
7	+24 V out	n.c.

### Connection X2

PIN	AC version	DC version
1	100 ... 240 V AC, ±10 %	0 V DC (GND)
2	100 ... 240 V AC, ±10 %	10 ... 30 V DC

# Multifunction devices, electronic

## LED multifunction display

## Multifunctional – pulse, frequency, time (AC+DC)

## Codix 544

### Dimensions

Dimensions in mm [inch]

