

## Codix 850/851



### Your benefit

- multifunctional, i.e. all usual measuring signals can be connected directly (voltage, current, thermocouples, resistance thermometers, resistance)
- flexible limit value monitoring (2 limit values)
- HART® communication socket for setting parameters
- LCD display and keys for on-site operation for model 851
- programmable input characteristic curve with up to 32 control points

### More advantages


- programmable via PC or keys
- integrated measuring transducer power supply
- RS232 interface for parameter setting and measured values output
- analog output with scale factor for current or voltage of the linearised input

### Technical data

Supply voltage:	18 ... 36 V DC (galvanically isolated)
Power consumption:	max. 4 VA
Display:	5-digit LCD-Display; height 6 mm [0.236"], LED's to indicate limit values, operation and fault conditions
Fuses:	AC: 315 mA slow blow; DC: 1 A slow blow
Data backup:	EEPROM
Housing:	plastic PC/ABS, UL94 V0
Ambient temperature:	-10 ... +50 °C [14 °F ... 122 °F]
Storage temperature:	-30 ... +70 °C [-22 °F ... 158 °F]
EMC:	according to EC EMC directive 89/36/EEC
Interference emissions:	EN 61 000-6-4/EN 55 011 Class B
Interference resistance:	EN 61 000-6-2
Protection: IP	20

Weight:	approx. 280 g [9.877 oz]
Interface:	RS 232, 3.5 mm [0.138"] stereo socket on housing front side
Connection:	coded, plug-in screw terminal, max. wire gauge 1.5 mm <sup>2</sup> [0.062"]
Inputs:	0 ... 1 V, 0 ... 20 V, ±100 mV, ±10 V 0 ... 20 mA, 4 ... 20 mA, ±20 mA Pt100, Ni100, potentiometers, thermocouples T, J, K, N, R, S, B, L, U, W3, W5
Measuring speed	1 measurement/second
Accuracy:	0.05 % FSD
Internal resistance:	voltage : 1 MΩ ; current: 5 Ω
Outputs:	0 ... 20 mA, 4 ... 20 mA, 20 ... 4 mA, 20 ... 0 mA 0 ... 10 V, fault behaviour acc. to NAMUR NE43
Resolution:	D/A: current 13 bits, voltage 15 bits
Limit value contacts:	optional 2 relays, each with 1 change-over contact 250 V AC/30 V DC, 5 A

### Dimensions:

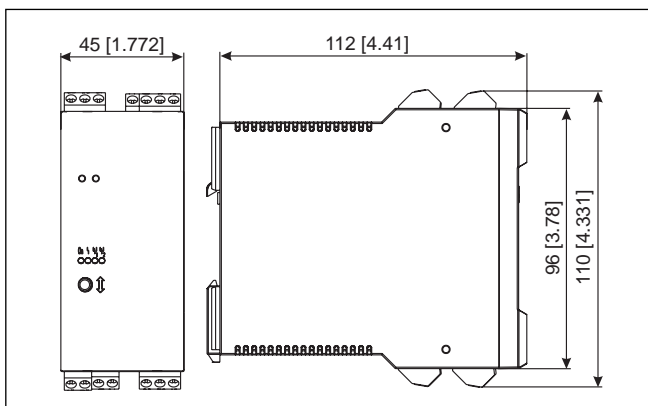


### Applications:

- Appliances
- Electrical cabinets and laboratory equipment
- Temperature display/monitoring
- Process acquisition/monitoring
- Process control
- Signal matching/conversion

### Example: Linearisation of the characteristic curve of a container


Our process controllers linearise the relationship between the fill-up level  $h$  and the volume  $V$  of the container. This can be set exactly thanks to 24 or 32 control points. The devices 850/851 can output the linearised values as current or as voltage values (e.g. 4 ... 20 mA) and thus offer in addition the function of a voltage transformer.

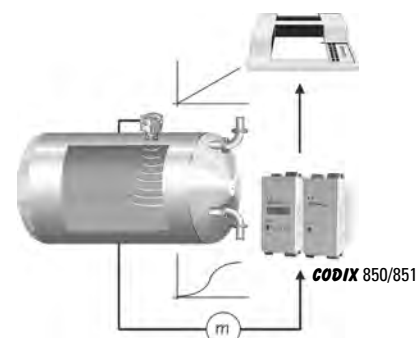


## Codix 850/851

### Connections


#### Supply voltage and outputs

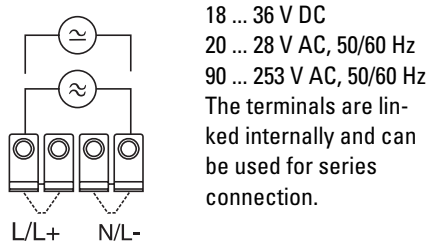


#### Measuring transducer (internal circuit)

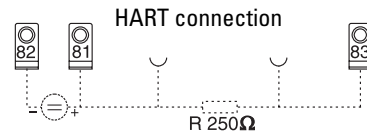


#### Measuring transducer excitation 2-wire sensor

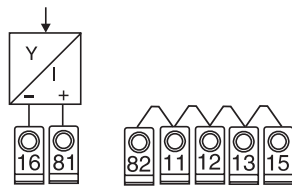


#### Relays (internal circuit)




#### Relays (internal circuit)

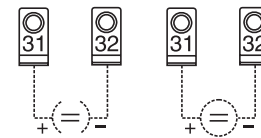


#### Current input ±20 mA, 0/4 ... 20 mA




#### Voltage input ±100 mV, thermocouples




#### Voltage input ±10 V, 0 ... 1/10 V




#### Resistance thermometers/potentiometers 2-wire

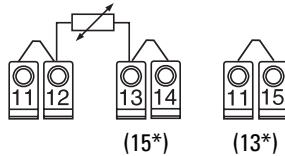

#### 3-wire

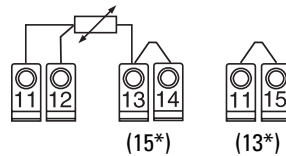

#### 4-wire

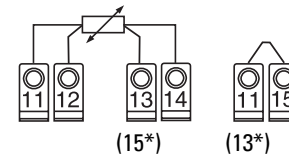

Connect Pt 500 and Pt 1000 to terminal 15, link 13 and 11

#### Order information:

Series  
0 = **CODIX 850** (without display)  
1 = **CODIX 851** (5-digit LCD, 3 keys)

Limit values  
0 = 2 relays  
2 = no limit values

0.85X.00X.XXX

Interface  
05 = RS232 serial interface  
95 = analogue output and RS232 serial interface

Supply voltage  
0 = 90 ... 253 V AC  
D = 18 ... 36 V DC and 20 ... 28 V AC

Please note:  
The combination  
0.850.002.X05 is not  
available.

#### Advice:

The use of the PC-Software with RS 232 connection cable (to be ordered separately) is strictly required for all versions  
0.850.XXX.XXX.

It is also recommended when using the 0.85 1.XXX.XXX versions to facilitate the device set up.

Order information:

N. 150.060 PC-Software including RS 232 connection cable