

Incremental encoders

Large hollow shaft optical	A020 (hollow shaft)	Push-pull / RS422 / SinCos
----------------------------	---------------------	----------------------------



The incremental encoder type A020 with optical sensor technology is available with a through hollow shaft up to max. 42 mm diameter.

With an installation depth of just 43 mm it is optimally suited for mounting on large shafts, even where space is tight.



High rotational speed



High protection level



Shock / vibration resistant



Magnetic field proof



Optical sensor

Compact

- Minimal installation depth but large hollow shaft.
- Available with compact M12 connector.
- Torque stop can be implemented even with small radius.

Flexible

- With push-pull, RS422 or SinCos interface.
- Hollow shaft from 20 mm up to 42 mm as standard.
- With cable connection, M12 or M23 connectors.

Order code Hollow shaft

8.A020	.	X	X	X	X	.	X	X	X	X
Type		a	b	c	d		e			

If for each parameter of an encoder the **underlined preferred option** is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



a Flange

- 2 = with spring element, short
3 = with spring element, long
 5 = with torque stop, long

b Through hollow shaft

- C = \varnothing 20 mm [0.79"]
 6 = \varnothing 24 mm [0.94"]
5 = \varnothing 25 mm [0.98"]
 3 = \varnothing 28 mm [1.10"]
A = \varnothing 30 mm [1.18"]
2 = \varnothing 38 mm [1.50"]
 B = \varnothing 40 mm [1.57"]
 1 = \varnothing 42 mm [1.65"]
 4 = \varnothing 1"

c Output circuit / supply voltage

- 1 = RS422 (with inverted signal) / 5 V DC**
 4 = RS422 (with inverted signal) / 10 ... 30 V DC
 2 = Push-pull (without inverted signal) / 10 ... 30 V DC
 5 = Push-pull (with inverted signal) / 5 ... 30 V DC
3 = Push-pull (with inverted signal) / 10 ... 30 V DC
 A = Push-pull (7272 compatible) / 5 ... 30 V DC
 8 = SinCos, 1 Vpp (with inverted signal) / 5 V DC
 9 = SinCos, 1 Vpp (with inverted signal) / 10 ... 30 V DC

d Type of connection

- 1 = radial cable, 1 m [3.28'] PVC
 A = radial cable, special length PVC *)
2 = radial M23 connector, 12-pin
E = radial M12 connector, 8-pin

*) Available special lengths (connection type A):
 2, 3, 5, 8, 10, 15 m [6.56, 9.84, 16.40, 26.25, 32.80, 49.21']
 order code expansion .XXXX = length in dm
 ex.: 8.A020.351A.2048.0030 (for cable length 3 m)

e Pulse rate


- 50, 360, **512**, 600, 1000, **1024**, 1500,
2000, 2048, 2500, **4096**, **5000**
 (e.g. 360 pulses => 0360)

SinCos version only available with pulses \geq 1024

Optional on request
 - other pulse rates

Incremental encoders

Large hollow shaft optical	A020 (hollow shaft)	Push-pull / RS422 / SinCos
-----------------------------------	----------------------------	-----------------------------------

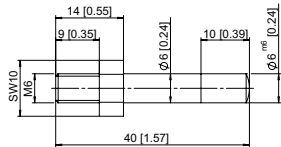Mounting accessory for hollow shaft encoders		Dimensions in mm [inch]	Order no.
Torque pin, ø 6 mm for flange with spring element (flange type 2 + 3)	with fixing thread 		8.0010.4700.0003
Cables and connectors			Order no.
Preassembled cables	M12 female connector with coupling nut, 8-pin, A coded, straight single-ended 2 m [6.56'] PVC cable		05.00.6041.8211.002M
	M23 female connector with coupling nut, 12-pin, cw single-ended 2 m [6.56'] PVC cable		8.0000.6201.0002
Connectors	M12 female connector with coupling nut, 8-pin, A coded, straight (metal)		05.CMB 8181-0
	M23 female connector with coupling nut, 12-pin, cw (metal)		8.0000.5012.0000

Further Kübler accessories can be found at: kuebler.com/accessories

Further K bler cables and connectors can be found at: kuebler.com/connection-technology

Technical data

Mechanical characteristics

Maximum speed	3000 min ⁻¹ 1)
Mass moment of inertia 2)	< 150 x 10 ⁻⁶ kgm ²
Starting torque with sealing at 20 °C [68 °F]	< 0.2 Nm
Weight	approx. 0.7 kg [24.69 oz]
Protection acc. to EN 60529	IP65
Working temperature range	-40 °C 3) ... +70 °C [-40 °F 3) ... +158 °F]
Material	shaft stainless steel H7
Shock resistance acc. to EN 60068-2-27	1000 m/s ² , 6 ms
Vibration resistance acc. to EN 60068-2-6	100 m/s ² , 10 ... 2000 Hz

Electrical characteristics SinCos output

Output circuit	SinCos U = 1 Vpp	SinCos U = 1 Vpp
Supply voltage	5 V DC (±5 %)	10 ... 30 V DC
Power consumption with inverted signal (no load)	typ. 65 mA max. 110 mA	typ. 65 mA max. 110 mA
-3 dB frequency	≤180 kHz	≤180 kHz
Signal level	channels A/B channel 0	
	1 Vpp (±20 %) 0.1 ... 1.2 V	1 Vpp (±20 %) 0.1 ... 1.2 V
Short circuit proof outputs 4)	yes	yes
Reverse polarity protection of the supply voltage	no	yes

Approvals

UL compliant in accordance with	File no. E224618
CE compliant in accordance with	
EMC Directive	2014/30/EU
RoHS Directive	2011/65/EU

1) Short term (app. 15 min. range) up to 3500 min⁻¹.

- 1) Short term (app. 15 min.) range
- 2) Depending on shaft diameter.

3) With connector: -40 °C [-40 °F], securely installed: -30 °C [-22 °F], flexibly installed: -20 °C [-4 °F].

4) If supply voltage correctly applied.

Incremental encoders

Large hollow shaft optical	A020 (hollow shaft)	Push-pull / RS422 / SinCos
----------------------------	---------------------	----------------------------

Electrical characteristics			
Output circuit	RS422 (TTL compatible)	Push-pull	Push-pull (7272 compatible)
Supply voltage	5 V DC ($\pm 5\%$) 10 ... 30 V DC	5 ... 30 V DC 10 ... 30 V DC	5 ... 30 V DC
Power consumption (no load)			
without inverted signal	–	typ. 55 mA/max. 125 mA	–
with inverted signal	typ. 40 mA/max. 90 mA	typ. 80 mA/max. 150 mA	typ. 50 mA/max. 100 mA
Permissible load / channel	max. ± 20 mA	max. ± 30 mA	max. ± 20 mA
Pulse frequency	max. 300 kHz	max. 300 kHz	max. 300 kHz
Signal level	HIGH min. 2.5 V LOW max. 0.5 V	min. $+V - 3.0$ V max. 2.5 V	min. $+V - 2.0$ V max. 0.5 V
Rising edge time t_r	max. 200 ns	max. 1 μ s	max. 1 μ s
Falling edge time t_f	max. 200 ns	max. 1 μ s	max. 1 μ s
Short circuit proof outputs ¹⁾	yes ²⁾	yes	yes
Reverse polarity protection of the supply voltage	no, 10 ... 30 V DC: yes	yes	no

Terminal assignment

Output circuit	Type of connection	Cable (isolate unused cores individually before initial start-up)											
1 ... A	1, A	Signal:	0 V	+V	0 Vsens	+Vsens	A	\bar{A}	B	\bar{B}	0	$\bar{0}$	\perp
		Core color:	WH	BN	GY PK	RD BU	GN	YE	GY	PK	BU	RD	shield

Output circuit	Type of connection	M23 connector, 12-pin											
1 ... A	2	Signal:	0 V	+V	0 Vsens	+Vsens	A	\bar{A}	B	\bar{B}	0	$\bar{0}$	\perp
		Pin:	10	12	11	2	5	6	8	1	3	4	PH ³⁾


Output circuit	Type of connection	M12 connector, 8-pin											
1 ... A	E	Signal:	0 V	+V	0 Vsens	+Vsens	A	\bar{A}	B	\bar{B}	0	$\bar{0}$	\perp
		Pin:	1	2	–	–	3	4	5	6	7	8	PH ³⁾

+V: Supply voltage encoder +V DC
 0 V: Supply voltage encoder ground GND (0 V)
 0 Vsens / +Vsens: Using the sensor outputs of the encoder, the voltage present can be measured and if necessary increased accordingly.
 A, \bar{A} : Incremental output channel A
 B, \bar{B} : Incremental output channel B
 0, $\bar{0}$: Reference signal
 PH \perp : Plug connector housing (shield)

Top view of mating side, male contact base



M12 connector, 8-pin



M23 connector, 12-pin

1) PH = shield is attached to connector housing.

Large hollow shaft optical

A020 (hollow shaft)

Push-pull / RS422 / SinCos

Dimensions hollow shaft version


Dimensions in mm [inch]

**Flange with spring element, long
Flange type 3**

- 1 3 x M4, 7 [0.28] deep
- 2 6 x M3, 8 [0.31] deep
- 3 Torque pin DIN 6325, \varnothing 6 [0.24]
- 4 Recommended torque for the clamping ring 1.0 Nm


D	Fit
20 [0.79]	H7
24 [0.94]	H7
25 [0.98]	H7
28 [1.10]	H7
30 [1.18]	H7
38 [1.50]	H7
40 [1.57]	H7
42 [1.65]	H7
1"	H7

Typ. insertion depth: 1.5 x D
up to L hollow shaft max.

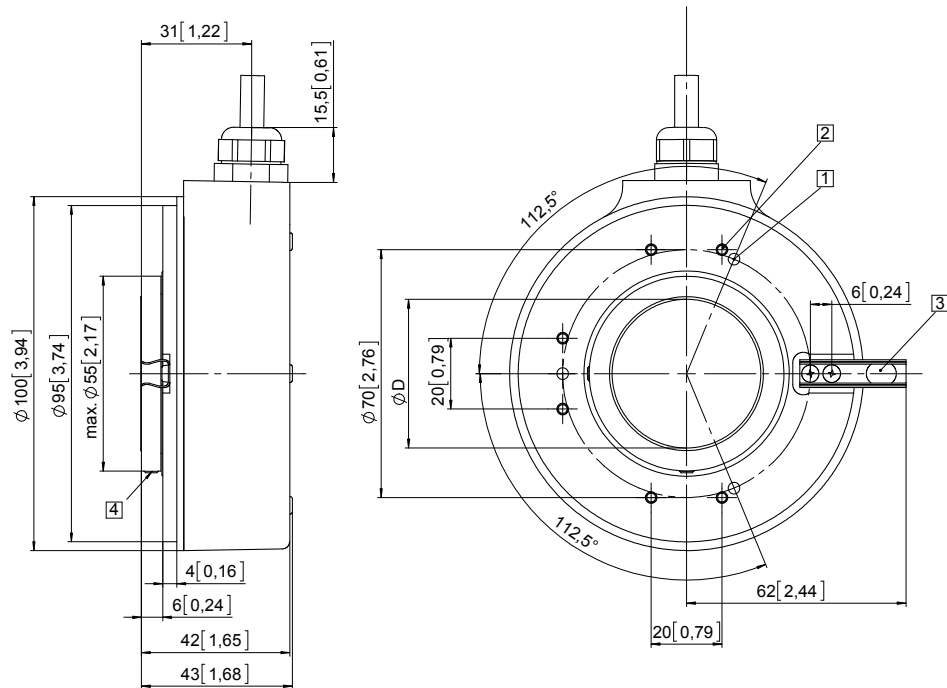

Flange with torque stop, long Flange type 5

- 1** Recommended torque for the clamping ring 1.0 Nm

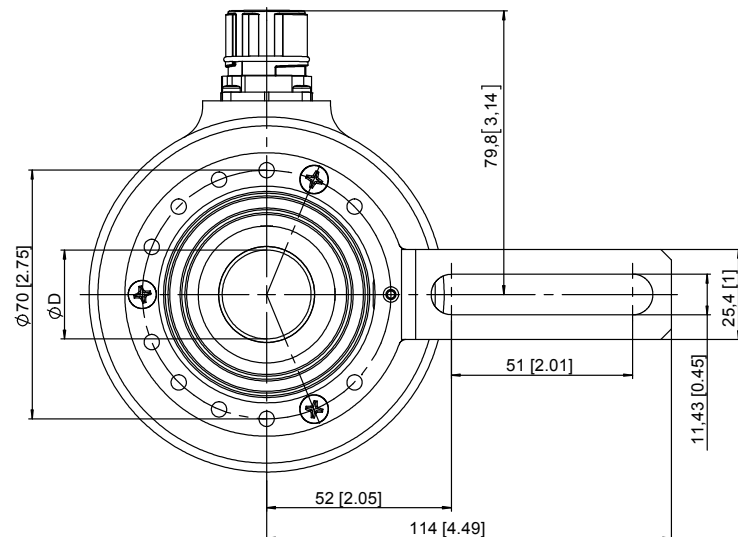

D	Fit
20 [0.79]	H7
24 [0.94]	H7
25 [0.98]	H7
28 [1.10]	H7
30 [1.18]	H7
38 [1.50]	H7
40 [1.57]	H7
42 [1.65]	H7
1"	H7

Typ. insertion depth: $1.5 \times D$
up to L hollow shaft max.

