

Linear measuring technology

Draw-wire encoder D125	Base-Line	Measuring length max. 10 m
-------------------------------	------------------	-----------------------------------



The draw wire system D125 is more than a sensor for determining length-related position data. Variants with integrated inclinometer and redundant interfaces offer versatile application possibilities. The contactless magnetic position scanning, a high IP67 protection level and the wider temperature range round off the product.



Analog output



-40°C ... +85°C
Wide temperature range



IP67
High protection level



Shock / vibration resistant



Redundancy

Characteristics

- Measuring length 6 ... 10 m.
- Integrated inclinometer.
- Redundant sensors.
- Different types of sensors (analog, CANopen).
- Linearity up to $\pm 0.5\%$ of the measuring range.
- High protection level IP67 and wide temperature range from -40°C ... +85°C.

Advantages

- The suitable measuring length for every application.
- Cost, space and installation work saving.
- For even higher plant availability.
- Simple selection and fast installation.
- High accuracy at economic prices.
- Reliability and long service life for outdoor applications.

Order code with analog sensor

D8 . D125 . XXXX . XXX1 . X000

a Measuring length

0600 = 6 m
0700 = 7 m
0800 = 8 m
0900 = 9 m
1000 = 10 m

b Single sensor

A11 = 4 ... 20 mA
A22 = 0 ... 10 V
A44 = 0.5 ... 4.5 V

Redundat sensor

R11 = 2 x 4 ... 20 mA
R22 = 2 x 0 ... 10 V
R44 = 2 x 0.5 ... 4.5 V

c Type of connection

1 = M12 male connector, 5-pin

d Power supply

1 = 12 ... 30 V DC
2 = 5 V DC¹⁾

Order code with CANopen and inclinometer

D8 . D125 . XXXX . RC11 . 1X00

a Measuring length

0600 = 6 m
0700 = 7 m
0800 = 8 m
0900 = 9 m
1000 = 10 m

b Sensor type

RC1 = CANopen redundant

c Type of connection

1 = M12 male connector, 5-pin

d Power supply

1 = 9 ... 30 V DC

e Inclinometers

0 = none
1 = 1 inclinometer
2 = 2 inclinometers

Stock types

D8.D125.1000.RC11.1000

1) Only in conjunction with type of sensor A44 and R44.

Linear measuring technology

Draw-wire encoder D125	Base-Line	Measuring length max. 10 m
Connection technology		Order no.
Cordset, pre-assembled	M12 female connector with coupling nut, 5-pin, A coded, straight single ended 2 m [6.56'] PVC cable	05.00.6081.2211.002M
Connector, self-assembly	M12 female connector with coupling nut, 5-pin, A coded, straight (metal)	8.0000.5116.0000
	M12 female connector with coupling nut, 5-pin, A coded, straight (metal/plastic)	05.B-8151-0/9
	M12 female connector with coupling nut, 5-pin, A coded, right-angle (plastic)	05.B-8251-0/9

Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology.

Technical data

Mechanical characteristics (draw-wire mechanics)		
Measuring range		6.0 ... 10.0 m
Measuring wire	material diameter	AISI304 steel wire Nylon coated ø 0.9 mm
Wire fastening	eyelet	
	internal diameter	ø 8 mm
	outer diameter	ø 15 mm
	height	2 mm
Speed max.		1 m/s
Acceleration max.		10 m/s ²
Linearity (whole measuring range)	analog	±1.0 %
	CANopen	±0.8 %
Repetition accuracy (whole measuring range)	analog	±0.5 %
	CANopen	±0.4 %
Pull-back force		typ. 4.5 N ¹⁾
Pull-out force		typ. 9 N
Type of connection		M12 connector, 5-pin
Housing		polycarbonate reinforced with glass fibers
Protection		IP67
Temperature range		-40°C ... +85°C [-40°F ... +185°F]
Weight		approx. 0.97 kg [34.2 oz]
Shock resistance acc. to EN 60068-2-27		300 m/s ² , 11 ms
Vibration resistance acc. to EN 60068-2-6		100 m/s ² , 10 ... 500 Hz

Electrical characteristics	
Power supply	9 ... 30 V DC 5 V DC ±10 % ²⁾
Electromagnetic compatibility	EN 61326-1, EN 61326-3-1
CE compliant	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU

Analog sensor	
Output signal	analog
Resolution	12 bit

CANopen	
Output signal	CANopen (DS301)
Resolution	14 bit
Resolution inclinometer	0.1°
Accuracy inclinometer	±0.6°
Temperature drift inclinometer	±0,01 % / °C


Operating principle

Construction

The core of a draw-wire device is a drum mounted on bearings, onto which a wire is wound. Winding takes place via a spring-loaded device.

Note

Exceeding the maximum extension length of the draw-wire will lead to damage to the wire and the mechanics.



1) May be lower at low temperatures.

2) Only in conjunction with type of sensor A44 and R44.

Linear measuring technology

Draw-wire encoder D125	Base-Line	Measuring length max. 10 m
-------------------------------	------------------	-----------------------------------

Terminal assignment


Sensor type	Interface	Type of connection	M12 connector, 5-pin						
A11, R11 (analog sensor)	current output	1	Signal:	+V	0 V	I _{out 1}	I _{out 2} ¹⁾		n.c.
			Pin:	1	2	3	4	5	

Sensor type	Interface	Type of connection	M12 connector, 5-pin						
A22, R22, A44, R44 (analog sensor)	voltage output	1	Signal:	+V	0 V	U _{out 1}	U _{out 2} ¹⁾		n.c.
			Pin:	1	2	3	4	5	

Sensor type	Interface	Type of connection	M12 connector, 5-pin					
RC1	CANopen	1	Signal:	+V	0 V	CAN-GND	CAN-H	CAN-L
			Pin:	2	3	1	4	5

- +V : Power supply +V DC
- 0 V : Power supply GND (0V)
- I_{out 1} : Current output 1
- I_{out 2} : Current output 2
- U_{out 1} : Voltage output 1
- U_{out 2} : Voltage output 2
- n.c. : not connected

Top view of mating side, male contact base



M12 connector, 5-pin

Technology in detail

Inclinometer with option RC1

Setting possibility 360°

0°

0° ... 360°

angle: 0° ... 360°

Setting possibility ±180°

0°

±180°

angle: ±180°

Redundant signals possible.

Setting possibilities:

- Switching between setting possibilities 180° and 360°.
- Switching between synchronous and asynchronous output.
- Change of direction of rotation (cw/ccw).
- Setting and resetting an offset.


1) Only in case of redundant ordering option sensor type R11, R22, R44 (otherwise n.c.).

Linear measuring technology

Draw-wire encoder D125	Base-Line	Measuring length max. 10 m
-------------------------------	------------------	-----------------------------------

Dimensions

Dimensions in mm [inch]

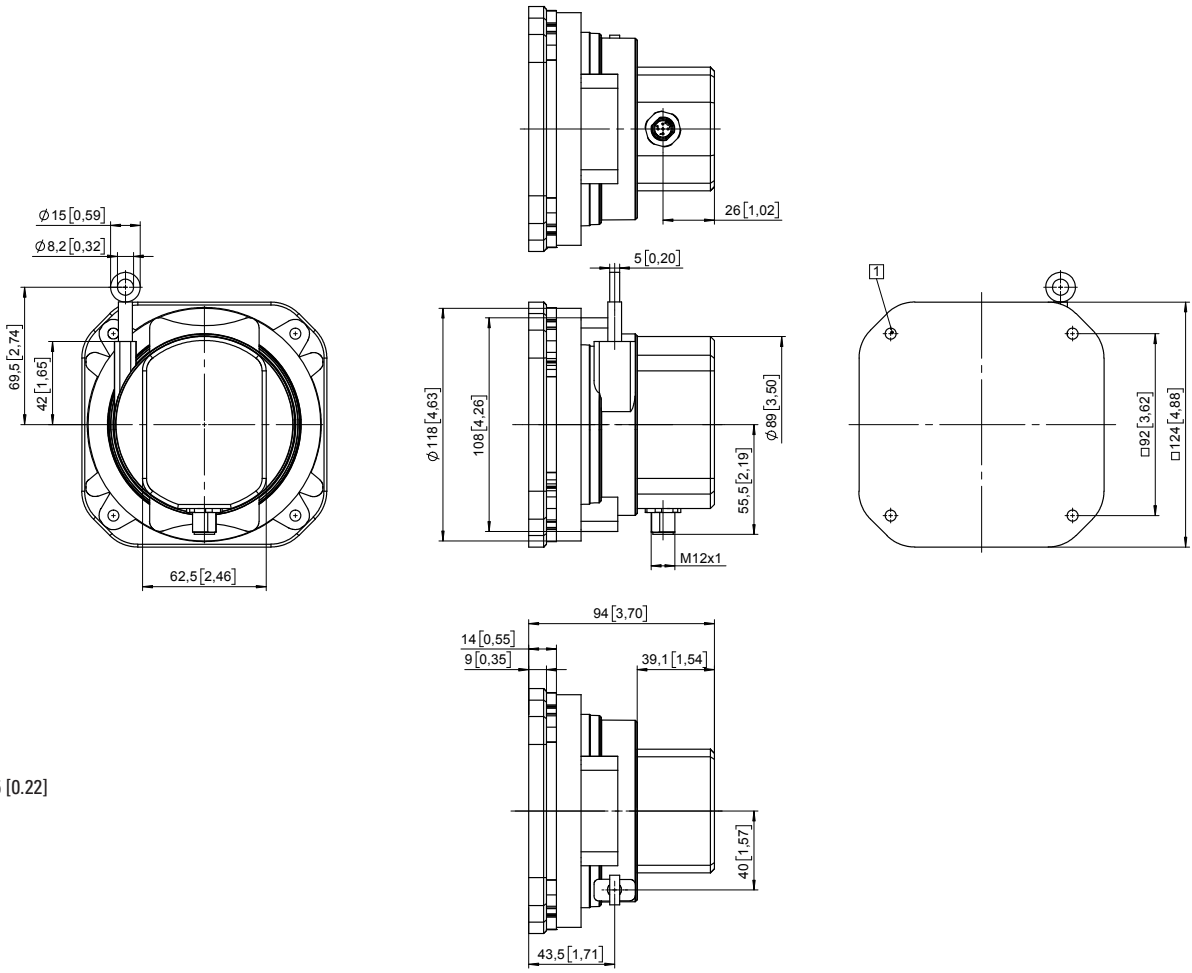

1 4 x $\phi 5.5 [0.22]$