


# Cables and connectors

**Cables**

**Unprepared, cut to length**

**12 core + shield**

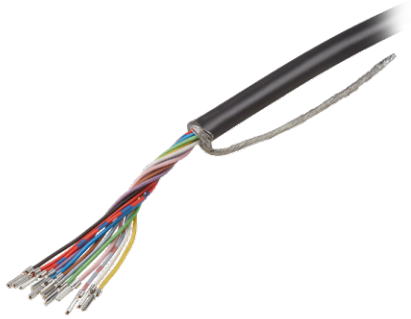

**PUR electronic cable**

**6 x 2 x 0.14 mm<sup>2</sup> + shield**



**Order details**

Order no.

XXXX = cable length in meters (e. g. 10 m = 0010)

**8.0000.6000.XXXX**

**Technical data**

<b>Cross section</b>	6 x 2 x 0.14 mm <sup>2</sup> + shield
<b>Working temperature range</b>	
flexible installation	-20 °C ... +90 °C [-4 °F ... +194 °F]
fixed installation	-40 °C ... +90 °C [-40 °F ... +194 °F]
<b>Bending radius cable min.</b>	
flexible installation	120 mm
fixed installation	80 mm
<b>Cable sheath</b>	
cable diameter approx.	7.8 mm ±0.2 mm
material sheath	PUR

**Features**

- halogen-free
- abrasion resistant
- low adhesion
- oil resistant
- microbe resistant
- flame retardant

**Cable construction**

