


Cables and connectors

Cables	Unprepared, cut to length	5 core + shield
---------------	----------------------------------	------------------------

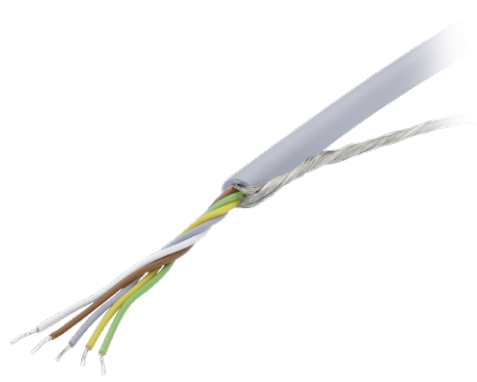

PVC electronic cable LiYCY

5 x 0.14 mm² + shield



Order details		Order no.
XXXX = cable length in meters (e. g. 10 m = 0010)		8.0000.6300.XXXX

Technical data		Features	Cable construction
Cross section	5 x 0.14 mm ² + shield	<ul style="list-style-type: none"> - abrasion resistant - low adhesion - flame retardant 	
Working temperature range			
flexible installation	-5 °C ... +70 °C [+23 °F ... +158 °F]		
fixed installation	-30 °C ... +70 °C [-22 °F ... +158 °F]		
Bending radius cable min.			
flexible installation	70 mm		
fixed installation	45 mm		
Cable sheath			
cable diameter approx.	4.7 mm ±0.2 mm		
material sheath	PVC		