


Cables and connectors

Cables

Unprepared, cut to length

6 core + shield

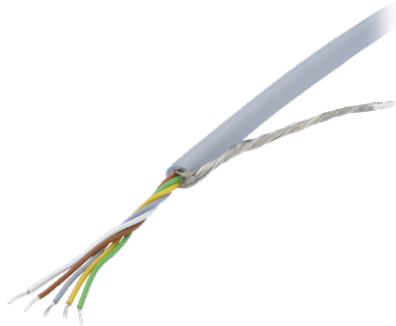

PVC electronic cable

3 x 2 x 0.25 mm² + shield



Order details

Order no.

XXXX = cable length in meters (e. g. 10 m = 0010)

8.0000.6V00.XXXX

Technical data

Cross section	3 x 2 x 0.25 mm ² + shield
Working temperature range	
flexible installation	-10 °C ... +90 °C [+14 °F ... +194 °F]
fixed installation	-30 °C ... +90 °C [-22 °F ... +194 °F]
Bending radius cable min.	
flexible installation	130 mm
fixed installation	60 mm
Cable sheath	
cable diameter approx.	6.2 mm ±0.2 mm
material sheath	PVC

Features

- abrasion resistant
- low adhesion
- flame retardant

Cable construction

