

# Accessories

## Robust bearing unit

Suitable for Sendix 50xx and 58xx




### Quick and simple – more protection

Separating the bearing load and the sensor technology affords the encoder greater protection in harsh environments.

Retrofitting to all encoders with a 58 mm clamping flange is very easy and quick.



Shock / vibration resistant



Temperature



High IP value



High shaft load capacity

Order no.

**8.0010.8200.000C**

### Robust bearing unit


matching shaft encoders with clamping flange and shaft 10 mm [0.39"]

### Technical data

<b>Maximum speed</b>	6000 min <sup>-1</sup>
<b>Weight</b>	approx. 560 g [19.75 oz]
<b>Protection</b>	IP67
<b>Material</b>	housing aluminum optional: seawater resistant shaft stainless steel


### Bearing life expectancy L10

at 3000 revolutions/min with continuous operation

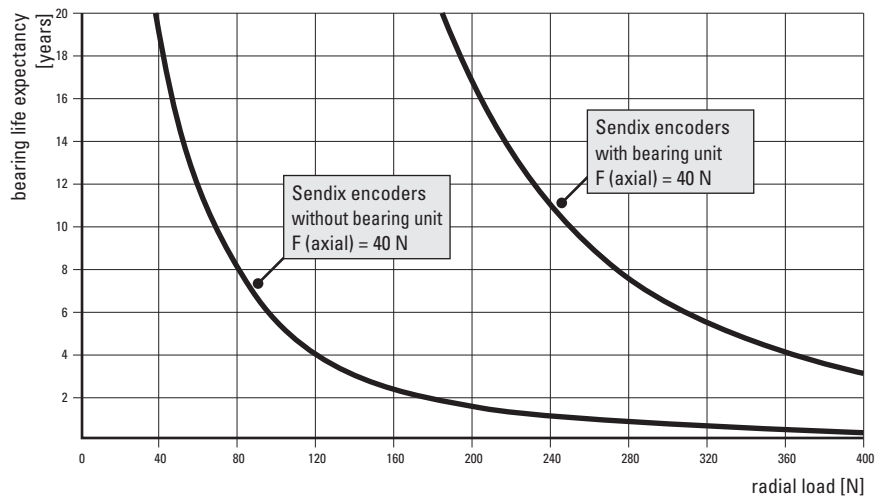

### Dimensions

Dimensions in mm [inch]

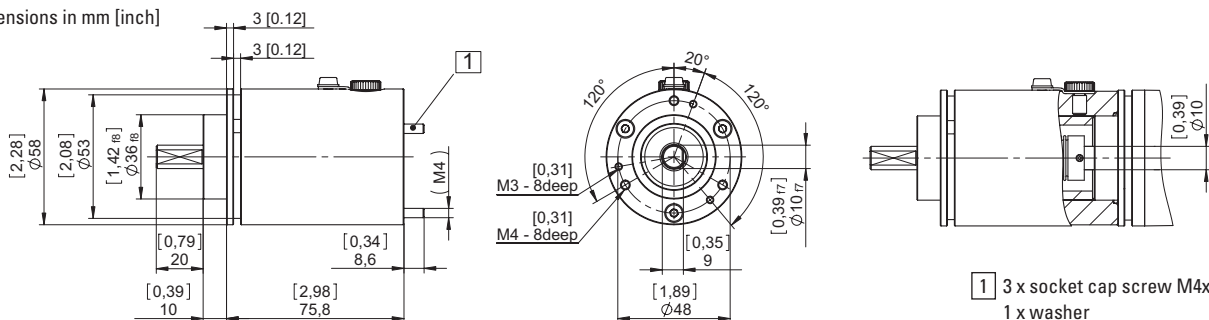

- 1 3 x socket cap screw M4x25 (SW3)
- 1 x washer
- included as mounting set