


Hour meters / timers, electromechanical

Micro timers	Many different installation options (DC)	HK07 / AHK07
---------------------	---	---------------------

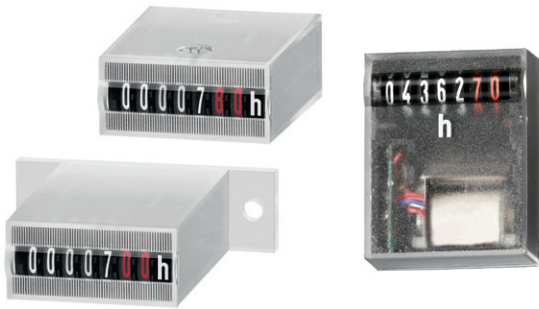

The micro timers of the HK07 and AHK07 families offer a particularly large number of variants and can be used in many different applications thanks to their wide voltage range from 4.5 to 35 V DC.

Available as panel, base and PCB mount versions, they can be used in many different fields of application. Thanks to their encapsulated housing, these non-resettable counters are extremely tamper-proof.

Characteristics

- 7-digit micro hour meter.
- High shock and impact resistance.
- Low power consumption; suitable for battery operation.
- Small dimensions – magnified large figures.
- Panel-mount counter with integrated spring clip.
- PCB-mount counter.
- Machine-solderable and wash-proof.
- Protection IP65.

Benefits

- Wide voltage range 4.5 ... 35 V DC.
- Count retention in case of power failure.
- Long service life.

Applications


General time measurement, maintenance intervals for measuring instruments (respiration units, oxygen, dialysis), small appliances, UV lamps, display panels in vehicles.

Type series


Fig.	Mounting options	Display	Protection	El. connection	Housing	Height of fig.	Type
1)	Panel mount with latch	front side	IP65, front side	flying leads	plastic	4 mm [0.16"]	HK07.20
2)	PCB mount, lying	on the top	IP65, front side/on rear	solder pins	plastic	4 mm [0.16"]	HK07.90
4)	PCB mount, upright	front side	IP65, front side/on rear	solder pins	plastic	4 mm [0.16"]	HK07.92
5)	Base mount, upright	front side	IP40	flying leads	plastic	4 mm [0.16"]	AHK07.00

Mounting options and position of the display


1) Panel mount
display front side




2) PCB mount, lying
display on the top




3) PCB mount, upright
display front side



4) Base mount, upright
display front side



Optional: PCB mount, hanging
display front side



Hour meters / timers, electromechanical

Micro timers	Many different installation options (DC)	HK07 / AHK07
---------------------	---	---------------------


Accessories					
		Type / size	Description		Order no.
Gasket counter		32 x 15 [1.26 x 0.59]	for cut-out 27 x 13 mm, suitable for HK07.20		N511058

Technical data		
Electrical connection	panel mount	flying leads, AWG 22 (red +, black -) approx. 150 mm [5.91"], 6 mm [0.24"] stripped wire ends, tinned
	PCB mount	solder pins 0.4 x 1.2 mm [0.016 x 0.047"], tinned
Power consumption (every 36 s with a pulse length of 32 ms)		
	at $U_B = 5$ V DC	typ. 82 mW
	at $U_B = 12$ V DC	typ. 135 mW
	at $U_B = 24$ V DC	typ. 135 mW max. 170 mW
Rated voltage	4.5 ... 35 V DC	
Residual ripple	< 1 %	
Current consumption	< 1.5 mA (average)	
On time	100 %	
Pulse duration	32 ms; every 36 s = 0.01 h On-times < 36 s will not be counted	
Number of digits	7: 99999.99 h	
Accuracy	22.5 ppm at 25 °C [77 °F]	
Height of figures	1.2 x 4.0 mm [0.047 x 0.16"]	
Color of figures	white and red on black	
Reset	no reset	
Operating temperature	-10 °C ... +60 °C [+14 °F ... +140 °F] (non-condensing)	
Mounting position	horizontal, other on request	
Solderable and washproof versions	HK07.90, HK07.91, HK07.92	
Soldering temperature	265 °C [+509 °F], 3 s	
Protection	up to IP65, depending on kind of type	
Housing	plastic PC (Polycarbonate)	
Weight	15 ... 18 g [0.53 ... 0.63 oz]	

Options
HK07.20 flat pin 0.8 x 2.8 mm [0.031 x 0.11"] (others on request)

Approvals	
CE compliant in accordance with	
EMC Directive	2014/30/EU
RoHS Directive	2011/65/EU

Panel mount with latch / display front side Type HK07.20

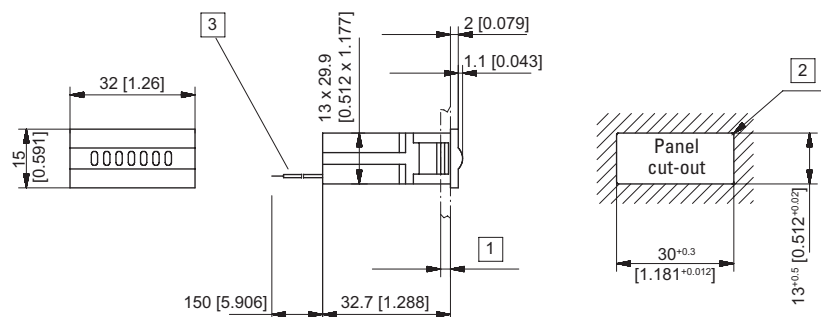

1) 1.2 ... 3 [0.047 x 0.12"] 2) $R_{max} 0.5$ 3) Flying leads (red+ / black-)


Type	Display	Art. no.
HK07.20	7 digits	4.5 ... 35 V DC 3.100.200.383
HK07.20.35 with flat pins	7 digits	3.107.200.383

Dimensions in mm [inch]


Hour meters / timers, electromechanical

Micro timers **Many different installation options (DC)** **HK07 / AHK07**

PCB mount, lying / display on the top
Type HK07.90

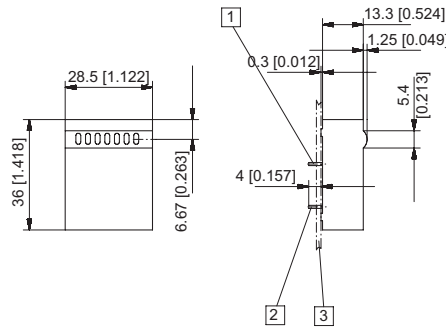


Punching diagram for PCB
(component side)




Type	Display	Art. no.
HK07.90	7 digits	4.5 ... 35 V DC 3.100.900.383

PCB mount, upright / display front side
Type HK07.92

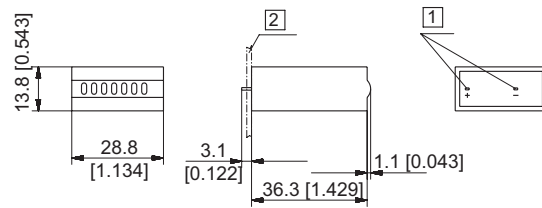


Punching diagram for PCB
(component side)



Type	Display	Art. no.
HK07.92	7 digits	4.5 ... 35 V DC 3.100.920.383

Base mount, upright / display front side
Type AHK07.00

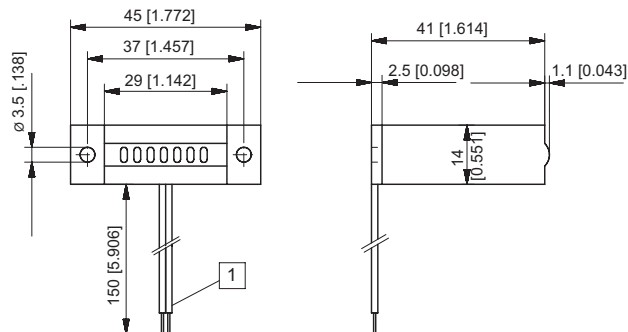

1) Flying leads (red+ / black-)

Type	Display	Art. no.
AHK07.00	7 digits	4.5 ... 35 V DC 3.100.000.383