


Cables and connectors

Cables

Unprepared, cut to length

12 core + shield

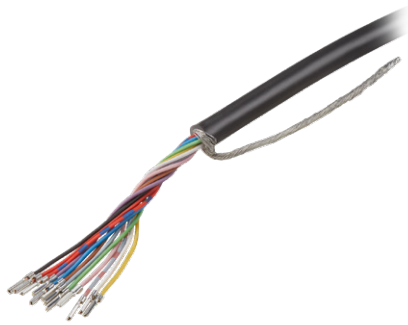

PVC electronic cable

4 x 0.10 mm² + 4 x 2 x 0.14 mm² + shield



Order details

Order no.

XXXX = cable length in meters (e. g. 10 m = 0010)

8.0000.6D00.XXXX

Technical data

Cross section	4 x 0.10 mm ² + 4 x 2 x 0.10 mm ² + shield
Working temperature range	
flexible installation	-5 °C ... +80 °C [+23 °F ... +176 °F]
fixed installation	-30 °C ... +80 °C [-22 °F ... +176 °F]
Bending radius cable min.	
fixed installation	40 mm
Cable sheath	
cable diameter approx.	5.8 mm ±0.2 mm
material sheath	PVC

Features

- halogen-free
- abrasion resistant
- low adhesion
- UV resistant
- flame retardant

Cable construction

